

## A COMPARATIVE EVALUATION FOR MANUAL AND COMPUTER GRAPHICS BASED SYSTEM FOR NC PROGRAMMING

تقييم استخدام الكمبيوتر في تصميم برامج ماكينات التحكم الرقمي بالمطارة بالطرق اليدوية

T. T. EL-MIDANY

and

M. A. EL-BAZ

Associate Professor

Research Assistant

Industrial Production Engineering Department

Faculty of Engineering , Mansoura University 35516

MANSOURA-EGYPT

تعتبر مشكلة برمجة ماكينات التحكم الرقمي من المشكلات الهامة التي لاقى اهتمام واسع منذ ظهور هذا النوع من الماكينات ، وكثرت المحاولات لجعل هذه المشكلة أكثر سهولة . وبدأ استخدام الكمبيوتر في تصميم هذه البرامج منذ الخمسينيات بظهور لغة APT ومنذ ذلك الحين وكثير من الأعمال تناولت هذا الموضوع الى أن ظهر استخدام الكمبيوتر في الرسم وامكانية استخدام البيانات المخزنة لاي رسم في اعادة تنظيم هذه البيانات وتصميم برامج ماكينات التحكم الرقمي . والمعروف انه مازالت تستخدم الطريقة اليدوية في تصميم برامج ماكينات التحكم الرقمي الى وقتنا الحاضر مما يؤدي الى استهلاك وقت الإنتاج وانخفاض الانتاجية وعدم الاستفادة من كفاءة مهندس الإنتاج بالقدر الكافي . ومنذ فام انتشرت : ( نى بحث سابق ) بتصميم نظام (AUTOGMC) هدفه تصميم برامج ماكينات التحكم الرقمي اوتوماتيكيا بالربط مع استخدام الكمبيوتر في الرسم ، وفي هذا البحث الحالي ، يتم استعراض مقارنة بين هذا النظام وبين الطريقة اليدوية المستخدمة في تصميم هذه البرامج . وقد اظهرت النتائج التي اجريت على العديد من الاجزاء ، ان استخدام هذا النظام يوفر حوالى 95 ٪ من الوقت المستخدم في البرمجة اليدوية بالإضافة الى الدقة العالية الناتجة من هذا النظام مما يؤدي الى تخفيض وقت تحميل واعداد الماكينات وكذلك تخفيض استهلاك المواد المستخدمة في التأكد من صحة البرنامج ، وهذا يقودنا بالطبع الى توفير عظيم في التكاليف الكلية وزيادة الإنتاجية وجودة عالية في المنتجات.

### ABSTRACT

Part programming involves the planning and specifications of the sequence of processing steps to be performed on the NC. It also involves , although less directly , the preparation of the input medium by which the processing instructions are communicated to the machine. Manual part programmer spends a substantial amount of time preparing a part program. Usually using a number of sketches or drawings , derived from a design drawing , to describe raw material size , intermediate operation size and tool path. Every change of direction , intersection or blend point , requires time consuming and error prone calculations. Our previous work AUTOGMC system which generates automatic NC programs overcomes the NC manual programming problems. The work in hand , illustrates a comparative study between manual and Computer-Aided Part Programming (CAPP) with special reference to the economic point of view. This CAPP is the actual result from an integration system , the benefits of that are great , since data for each application does not have to be reentered , costly redefinition and reformatting are eliminated. The investigation of this work has shown not less than 95% saving in time which in reality leads to a great saving in the total cost expenditure and no doubt more benefits should be expected i.e productivity , quality , etc. Thus one can say that fully integration for the Computer-Aided Engineering

## INTRODUCTION

A part programmer studies the part drawing and the process chart and then prepares the control program on a standard form in the specified format. He spends a substantial amount of sketches or drawings derived from a design drawing, to describe raw material size, intermediate operation size and tool path. Every change of direction, intersection or blend point, requires time consuming and error prone calculations. The handwritten part program is prepared in a machine code peculiar to the particular machine tool and control system combination. Because the part program comprises a listing of letters and numbers, it is difficult to review. Therefore, there is further risk of mistakes arising from using the handwritten part program. Limitations of manual part programming can be summarized as: heavy use of man power resources, serious loss of machine productivity and the skill of the production engineer are not used effectively. Changes have occurred over the years however to make the task of the manual part programmer less difficult. One of the very recent techniques is the AUTOGMC system developed by El-midany and El-baz [1], which considered as a new approach for the industry. The developed system besides overcoming the manual programming problems, it is an automatic NC program for any profile component, the ability and flexibility of its higher performance are illustrated clearly through the complicated profiles components.

## THE INTEGRATION CONCEPT IN CAE

Computer-Aided Engineering (CAE) can be defined as the integration of computer-aided design, analysis and manufacturing. This integration is used to improve manufacturing productivity in the industry. Needs and pressures in state-of-the art technologies, economics, human limitations, design and manufacturing complexity, computer developments and competition from abroad, serve to complicate the ability to meet these needs. The key to implement CAE is one integrated databases. The major problem in a system of linked databases is in the area of modifications, where changes in one database need to be automatically reflected in the other linked databases. This is clearly impossible when data is being converted from one database format to another database format and no connection is maintained in the database. CIM is another abbreviation which has recently come into use. It standards for computer integrated manufacturing and means the integration by using computers in various manufacturing areas such as NC, process planning, inspection, tools, and fixtures design, etc. Current production systems depends heavily on intermediate stages of human intervention, including design conceptualization, decision making, data communication, report documentation, etc. which if computer assisted can be efficient. If not so aided, then these stages as well as other manned activities become manpower intensive and tedious works. Such activities are usually relatively slow and economically inefficient when compared to the automated and/or computerised components of the operation. The benefits of integration are great. Since data for each application does not have to be re-entered, costly redefinition and reformatting are eliminated. Transcription errors are abbreviated as are lead times. Since the

information is more accurate, product quality and reliability are enhanced integration improves the communications between manufacturing and engineering organisations. The usefulness of the CAD/CAM data base as CIM integrator is further enhanced if the data base is intelligent. For example a change in the product model which consider the heart of the CAD/CAM data base El-midany [2] should be reflected in other applications such as the manufacturing data required for NC machines.

#### PROBLEMS WITH MANUAL PROGRAMMING

1. Drawing both the required outline and the tool path of the machined part according to its radius by the traditional graphic method.
2. Analysis the drawing part into straight lines and arcs.
3. Determinethe tangential points between each sequential drawing elements.
4. The arcs which are found in more than one quadrant 90 must be subdivided into more than one arc, each subarc must not exceed one quadrant.
5. The straight line is determined by the coordinates of the initial and final points.
6. Each arc determined by the coordinates of the initial and final point and the coordinate of its centers.
7. With respect to the arcs, they are used more complicated analysis, the distance between the initial point and the center of each arc, along both X and Y axis must be calculated.
8. To ensure continous tool path. It is necessary to know the direction of the arc to be suitable with the desired machining sequence operation.
9. As the geometry of the workpiece needs separate cutting in certain position. The tool must do rapid return and the required position moves under the tool to complete the required cutting. Figure 1 illustrates the complete processing operations for the part drawing.

#### COMPUTER ASSISTED PART PROGRAMMING

Most parts machined on NC systems are considerably more complex. In the more complicated contouring applications, manual part programming becomes an extremely tedious task and subject to errors. In these instances it is much more appropriate to employ the high-speed digital computer to assist in the programming process. This trend began in the late 1950's with the development of the APT, many innovations have been made in NC languages and NC programming. Among these are the use of interactive graphics. Further innovations have been made in NC programming using the idea of interactive graphics. These innovations used different interactive graphic systems with other different programs. The main features of these innovations that the NC part programmer was the heart of these systems and they need a high professional NC part programmer. So, with the tremendous advances made in NC programming over the last decades, it was not difficult to imagine that the entire logic of the part programming process will not be captured and feed to the computer. This would permit NC programming to be accomplished completely and automatically by the computer without human assistance.

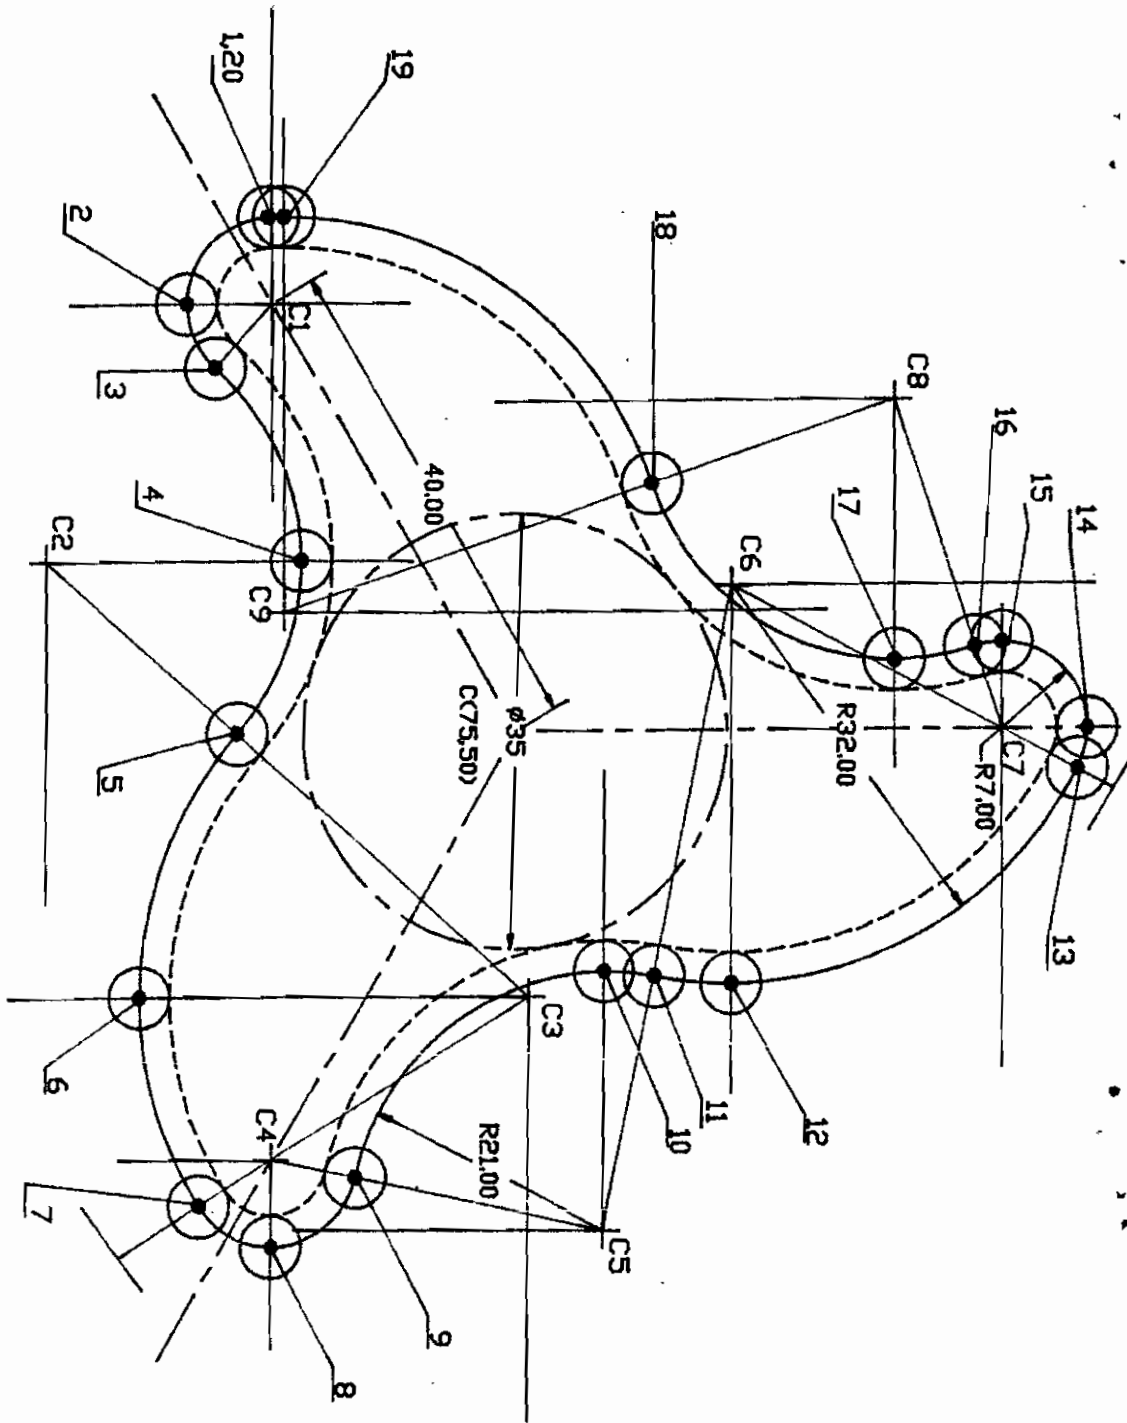


Fig 1. Processes required for analysing the part drawing.

## AUTOMATIC GENERATION OF NC PROGRAMS FOR MILLING COMPONENTS

The developed AUTOGMC system [1] translates the existing information on the workpiece which previously drawn by the aid of AUTOCAD into data which can be used by dBASEIV to generate the complete commands for machining the workpiece. These functions include tool path, data ordering, operation sequence, miscellaneous and preparatory machine functions, as well as validation of the tooling process. The following examples (complete NC part programs for two different components) as illustrated in Figures 2&3 have been selected from different profiled components to show the complicity of the profile contour in case of milling. Figure 3 illustrates an elliptical contour. Ellipses considered to be the most complicated profiles to produce on the NC milling machine. It is extremely difficult to prepare the NC part program by manual method, because it is necessary to divide the ellipse into a number of equiangular arcs. The problem is presented in calculating the coordinates of each arc and its centers and it should be noted that a curve drawn around, or inside, an ellipse and a constant distance from it, by manual method, is not itself an ellipse, Puckle and Arrowsmith [3], and it cannot, therefore be used to define the path of the cutter center. This needs mathematical calculations to define the proper points required. Now, by the aid of AUTOGMC system [1], it is easy to draw the ellipse, the cutter path and using the command "explode" to replace the ellipse to the simple entities (arcs). Then the user can complete the procedure to extract the NC program as shown in Figure 3.b.

## JUSTIFICATION

The justification required for investment in AUTOGMC is best demonstrated by executing the part drawing shown in Figure 1. by the manual programming and by using AUTOGMC. This comparison is clearly appeared in the following, see Table 1.

Process	Time in min	
	Manual	AUTOGMC
. To develop the required drawing	120	10
. Prepare the NC part program	180	2
. Check & edit & effort	90	-
.Total manhour/part	390	12

From the above table the saving in the processing time is almost 95% which considered to be a tremendous achievement. It is very clear to the production engineering sector that the turnover of the system would be great even if the ential expenditure is very high.

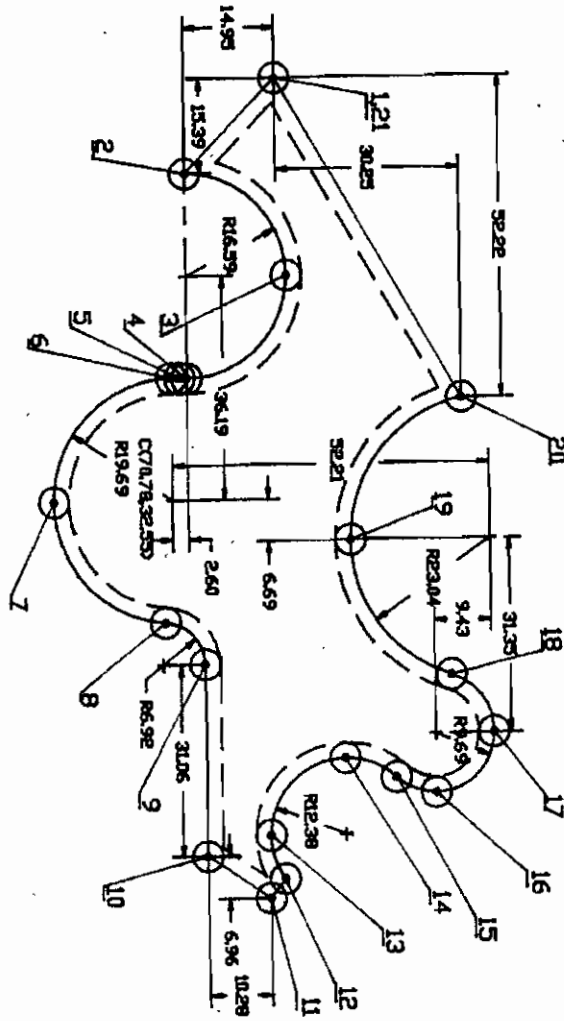


Fig 2.a Example 1.

Record#	G	M	X	Y	Z	I	J	F	S
1	90								
2	71								
3			0	0	5	10	5	1	
4		03							2000
5			2.62	50.16					
6	01				-2				100
7	01		18.01	35.21					100
8	02		34.60	51.74		16.58	0.055		100
9	02		51.19	35.15		0.001	16.58		100
10	02		51.14	33.97		16.59	0.004		100
11	03		51.09	32.55		19.64	1.415		100
12	03		70.78	12.86		19.69	0.004		100
13	03		90.42	31.14		0.003	19.69		100
14	02		97.32	37.56		6.903	0.493		100
15	01		128.38	37.56					100
16	01		135.34	47.84					100
17	01		132.21	50.30					100
18	02		125.07	48.03		7.139	10.10		100
19	02		112.69	60.41		0.000	12.37		100
20	02		115.96	68.78		12.38	0.003		100
21	03		118.51	75.34		7.141	6.557		100
22	03		108.82	85.03		9.691	0.002		100
23	03		99.54	78.13		0.001	9.692		100
24	02		77.47	61.72		22.06	6.634		100
25	02		54.94	80.41		0.000	23.04		100
26	01		2.62	50.16					100
27					5				
28		05							
29		30							

Fig 2.b Complete program list for the part drawing shown in Fig 2.a.





Record#	G	M	X	Y	Z	I	J	F	S
1	90								
2	71								
3			0	0	5	10	5	1	
4		03							2000
5			34.77	53.77					
6	01				-2				100
7	03		37.83	43.87		17.53	0.003		100
8	03		48.33	33.94		28.19	19.27		100
9	03		62.52	28.01		26.76	44.16		100
10	03		81.05	25.72		18.52	73.81		100
11	03		99.58	28.01		0.001	76.10		100
12	03		113.77	33.94		12.57	50.09		100
13	03		124.27	43.87		17.69	29.20		100
14	03		127.33	53.77		14.47	9.896		100
15	03		124.27	63.66		17.53	0.003		100
16	03		113.77	73.60		28.19	19.27		100
17	03		99.58	79.52		26.76	44.17		100
18	03		81.05	81.81		18.53	73.81		100
19	03		62.52	79.52		0.001	76.10		100
20	03		48.33	73.60		12.57	50.09		100
21	03		37.83	63.66		17.69	29.21		100
22	03		34.77	53.77		14.47	9.893		100
23					5				
24		05							
25		30							

Fig 3.b. Complete program list for the part drawing shown in Fig 3.a.

## CONCLUSION

Part programmers are hard to find and hard to train. It often takes 24 , even 500 hours to prepare the part program for a component to be produced on the NC machine tool. One of the important questions to be asked to the NC user does this not limit the number of machine tools which can be purchased to increase machining productivity. Saving of processing time and total cost resulted from the automatic generation of the NC programs are very promoted. Our future goal is to design our own interface terminal to use any PC's computer directly with the machine tool control unit to feed the NC data directly to be executed on the machine tool.

## REFERENCES

1. El-Midany, T.T and El-Baz, M.A. " A New Approach for Automatic Generation of NC programs for milling components (AUTOGMC)." Ain Shams University , Engineering Bulletin , Vol.25 No.2 , pp 308-317 , August (1990).
2. El-Midany, T.T " Computer-Aided Manufacturing Data for CAD/CAM system" 6th Intr. Conference on Computer-Aided Production Engineering , The Royal Society , London , Nov.12-13 (1990).
3. Puckle , D.S and Arrowsmith , J.R. "An Introduction to Numerical Control of Machine Tools", W&J.Mackay&Co Ltd, Chatham, Chapman Hall, pp 224-227, 1968.